

LOFT LINE

Feel the Difference



TELESTEPS 

No.1 in telescopic work tools



EN 14975
European Standard
Europäische Norm
Norme Européenne
Conforme aux exigences
de sécurité

MANY ADVANTAGES

SIMPLE

We have always been convinced that the best ladder is both short and long. The telescopic ladder is easy to pull out to the desired length and securing it before use is just as easy.

FLEXIBLE

Heavy ladders that take up a lot of space are often a necessary evil. This does not hold true for the Telesteps Loft ladder. It is easy to assemble, takes up minimum space in the attic and requires a small loft hatch. Heavy and cumbersome loft ladders are yesterday's news.

QUALITY & SAFETY

The products are certified according to leading norms - EN 131, SP - and more. For more info on Telesteps safety work visit www.telesteps.com

DESIGN

Simple locking system with only two buttons. Wide steps for a safer experience. Holder that keeps the ladder from sliding out when opening the hatchet.

All of a sudden the **Loft** is Your new **Favorite** place to be.



LOFT MINI

Art. no:	60324-101
No. of treads:	9
Tread width:	90 mm
Floor to fitting plate:	2,21-2,45 m
Min. hatch opening:	520x600 mm
Weight:	13 kg




LOFT MAXI

Art. no:	60927-101
No. of treads:	10
Tread width:	90 mm
Floor to fitting plate:	2,52-3,0 m
Min. hatch opening:	520x920-1100 mm
Weight:	15,5 kg

LOFT MINI


Loft MINI is a loft ladder suitable for installation height between 2.21 - 2.45 meters. Note that the attic door must have free space to be closed, hence the ladder is mounted above the closed door. The closed ladder requires free space on the attic (A2 = 105mm).

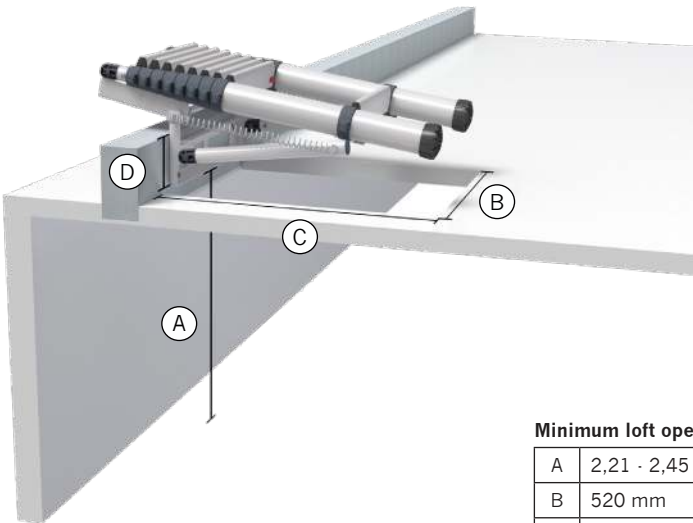

Minimum loft opening


A	2,21 - 2,45 m
B	520 mm
C	600 mm
D	100-124 mm

A, Floor to the fitting plates lower edge (★)
D, Min.-Max. height of mounting area

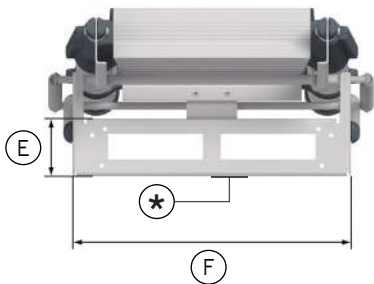

Size mounting area

E	105 mm
F	440 mm

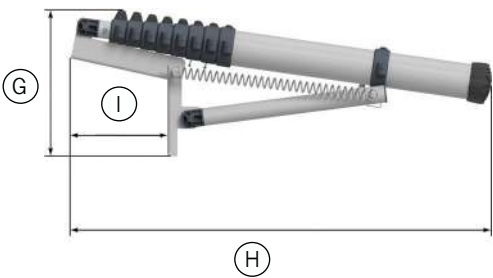


Loft ladders outer area

G	265 mm
H	760 mm
I	180 mm

LOFT MAXI


Loft MAXI is an adjustable loft ladder suitable for installation heights between 2.52 - 3.0 meters. Note that the attic door must have free space to be closed, hence the ladder is mounted above the closed door. The selected installation height determines the need of the attic opening.

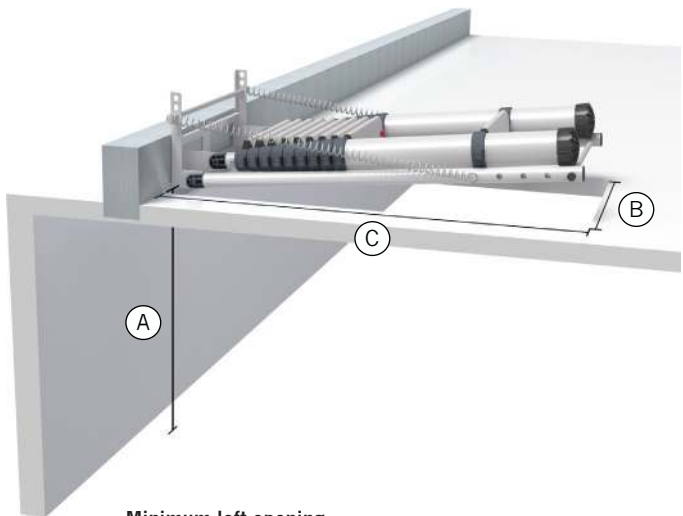

Minimum loft opening

A	2,52 – 2,75 m	2,70 – 2,80 m	2,75 – 2,85 m	2,80 – 2,90 m	2,85 – 3,0 m
B	520 mm	520 mm	520 mm	520 mm	520 mm
C	920 mm	950 mm	1000 mm	1050 mm	1100 mm

A, Floor to the fitting plates lower edge (★)

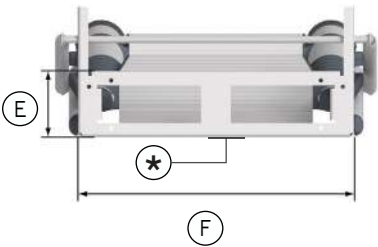

Size mounting area

E	105 mm
F	440 mm



Loft ladders outer area

G	207 mm
H	896 mm



Many years ago Telesteps created an icon in the world of ladders and today they are recognized as the world leaders in telescopic work tools. The Telesteps brand is renowned for its quality and design by many professionals tradesmen worldwide ensuring they always put safety and quality first.



Telesteps AB, Box 362, 573 24 Tranås, Sweden
Tel: +46 140 38 68 00 | info@telesteps.com | www.telesteps.com